


b.) Amendment to the Claims


1. (Currently Amended) A display device comprising a surface-protective layer, an information display layer, a light-reflective resin sheet and a substrate-adhesive layer, said display device being a number plate adhered to an auxiliary substrate via said substrate adhesive layer, said auxiliary substrate being mechanically fixed on an installation substrate, said auxiliary substrate having a size larger than said display device, said display device being installed on a front face of said auxiliary substrate and said auxiliary substrate being capable of ~~wrapping around~~ wrapping-up the display device,

wherein a specular reflective layer is installed ~~overlapping~~ installed in said light-reflective resin sheet via a destructive layer, said specular reflective layer and said installation substrate being adhered via the substrate-adhesive layer, such that (i) when said display device is peeled off from the installation substrate, separation takes place at the interface of the destructive layer and any one of the layers constituting the light-reflective resin sheet which is in contact with the destructive layer, and/or by destruction of the destructive layer, and (ii) the specular reflective layer remains on the installation substrate,


said destructive layer comprising cyclopentane resin according to formulae 1a, 1b or 1c, vinylcyclopentane resin according to formula 2a, vinylcyclopentanorbornene resin according to formula 2b, cyclohexadiene resin according to formula 3a, cyclohexane resin according to formula 3b or methacrylic acid ester resin according to formula 4:




(1a)





(1b)



(1c)

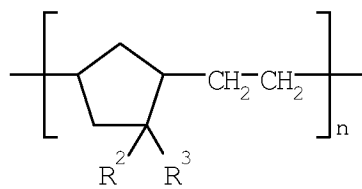

(2a)

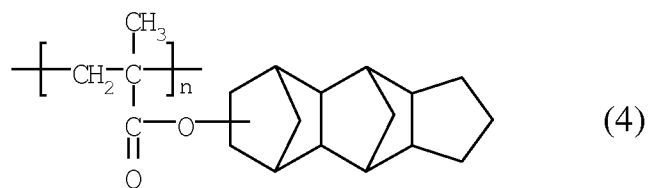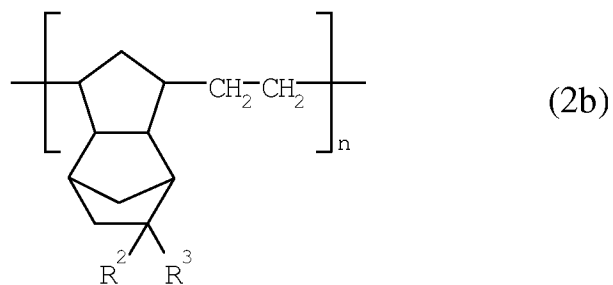

in which  $R^1$  is hydrogen atom or cyclohexyl;  $R^2$  and  $R^3$  are independently hydrogen atom, methyl, cyano, methoxycarbonyl, ethoxycarbonyl, cyclohexyloxycarbonyl or n-butoxycarbonyl; and  $n$  stands for number-average degree of polymerization.

2. (Previously Presented) A display device as set forth in Claim 1, wherein the light-reflective resin sheet is a retroreflective sheeting layer comprising glass

beads and a specular reflective layer installed on the glass beads via said destructive layer and a focusing layer.

3. (Previously Presented) A display device as set forth in Claim 1, wherein the light-reflective resin sheet is a microprismatic retroreflective sheeting layer formed of microprisms with a specular reflective layer being installed on the reflective side faces of the microprisms.

Claims 4-6 (Cancelled).

7. (Currently Amended) A display device as set forth in any one of claims 1-3, comprising an active or passive RFID device equipped with a communication antenna installed on a back of the display device, which is a side opposite from said ~~surface-protection~~ surface-protective layer.

8. (Previously Presented) A display device as set forth in Claim 7, wherein a zone of the specular reflective layer which overlaps with the communication antenna is removed.

9. (Previously Presented) A display device as set forth in Claim 8, wherein the specular reflective layer is installed within a portion of the light-reflective resin sheet to form said communication antenna, and when the display device is peeled off from the installation substrate, the specular reflective layer is broken and loses its antenna function.